


ESS 1000X

ECOWATER SERIES • WATER SOFTENER



Enjoy Cleaner, Softer Water Throughout Your Home

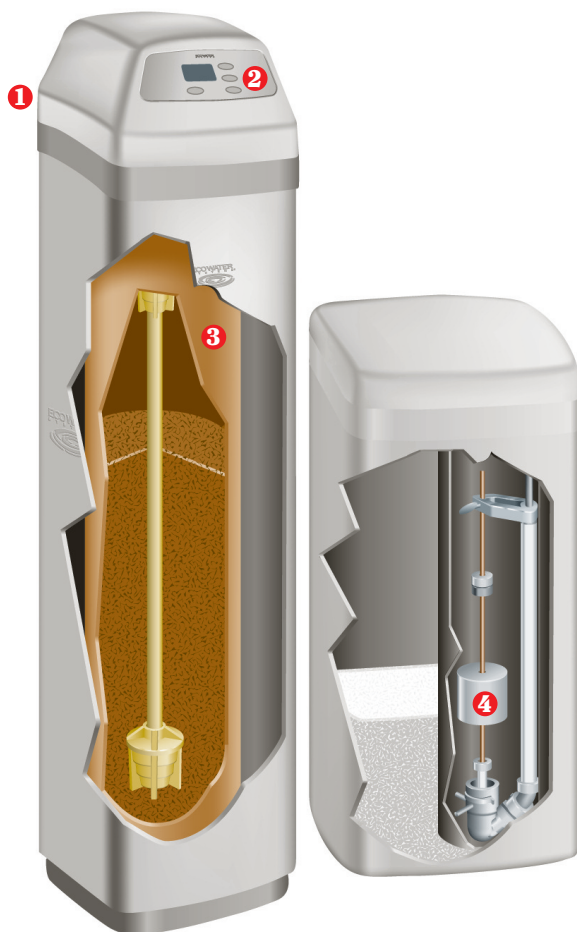

- ❶ Automatic Bypass
- ❷ Electronic Timer
Electronic timer controls regeneration frequency. Full menu-driven options.
- ❸ Multi-Wrap Fiberglass Reinforced Resin Tank
Durable fiberglass-wrapped tank liner, doesn't deteriorate, rust or corrode.

Six/Eight-Cycle Valve with Easy-Clamp Ring and Patented Coated Discs

Ability to Choose Media for Custom Applications

Ships without media to give flexibility in providing solutions for different problem water situations.

- ❹ Positive-Action Brine Valve
Snap-together construction eliminates use of solvents that may contaminate water. Positive action helps prevent overfilling.

Energy Efficient 24-Volt Transformer

Simplifies installation, maintenance and reduces electrical hazards.



Designed, Engineered &
Assembled in the U.S.A.




Clean water.
Green future.™

ECOWATER.CA

ESS 1000X

DIMENSIONS

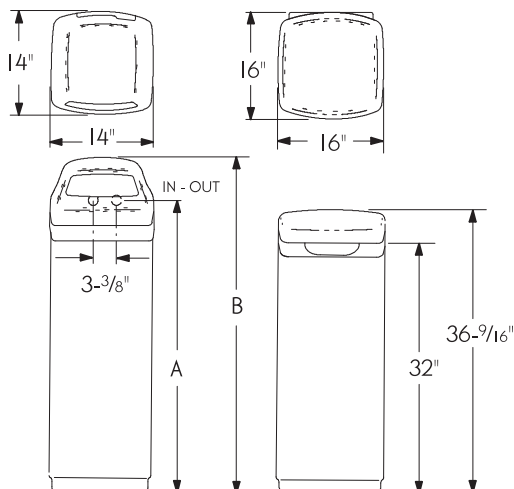

	ESS 1000XR32
Nominal Resin Tank Size	10" Dia. x 47"
A	49.8"
B	56.6"



SPECIFICATIONS

ESS 1000XR32

Supply Water Pressure Limits (psi) ¹	20 – 125
Supply Water Temperature Limits (°F)	40 – 100
Service Flow Rate (gpm) ²	9
Water Used Each Regeneration (gal.) ³	41
Salt Storage Capacity (lbs.)	300
Electrical Rating (transformer provided)	24V-60Hz

¹Maximum pressure for Canadian use is 7.0 kg/cm²

²Not to exceed 15 psi pressure loss

³When operated at 35 psi water pressure



A Marmon Water/Berkshire Hathaway Company



EcoWater Canada Ltd.
5240 Bradco Blvd.
Mississauga, Ontario
Canada L4W 1G7

EcoWater Systems LLC
P.O. Box 64420
St. Paul, MN 55164-0420
www.ecowater.com

Your Authorized EcoWater Dealer:

(Rev. E) 10/11

© 2011 EcoWater Systems LLC

ECOWATER.CA